

CIAO1MAL3B

HIGH SPEED OVEN
DUAL TECHNOLOGY:
3D IMPINGEMENT + MICROWAVE
7" IPS TOUCH SCREEN

FUNCTIONAL CHARACTERISTICS	
Display	7" CAPACITIVE
Color	Inox
Magnetron	1 x 1000W
Heater	2,8kW
Supply	Electric
Number of motors	1
Motor speeds	10 speeds
Max cooking temperature	270°C
Core probe	Single point PT1000
Cooking chamber material	AISI304
Opening door	Flap door
Chimney	20 mm open
Version	Standard
Ventless	Standard

VENIX SRL Via della Fornace, 49 - 31023 Castelminio di Resana (TV) - ITALY
P +39 (0) 423 420 477 / +39 (0) 423 723 608 - F +39 (0) 423 492 307
email: info@venix.it
www.venix.it


STANDARDS		
Certification		CE
TRAYS		
Trays rack		Sheet metal single level
Max tray load		3 kg
Standard tray		50GPP00081
DIMENSIONS		
Oven size with handle WxDxH		363 x 730 x 630 mm
Oven size without handle WxDxH		363 x 679 x 630 mm
Chamber size WxDxH		310 x 320 x 170 mm
Unit weight		56.2 kg
PACKAGING		
Packaging		Pallet + carton box
Packaging size WxDxH		410 x 790 x 780 mm
Unit weight with packaging		62.8 kg
Crate packaging size (optional)		410 x 790 x 780 mm
Unit weight with crate packaging (optional)		74 kg
ELECTRICAL DATA		
	HEATERS 2,8kW 50Hz	
Power	3,6kW	
Frequency	50/60Hz	
Power supply	220-240V~	
Amperage	15,6A	
Power cord req.	3G1,5	
CONNECTIVITY		
USB		USB 2.0
Bluetooth		Standard
Wi-Fi		Standard
Cloud		Standard


VENIX SRL Via della Fornace, 49 - 31023 Castelminio di Resana (TV) - ITALY
P +39 (0) 423 420 477 / +39 (0) 423 723 608 - F +39 (0) 423 492 307
email: info@venix.it
www.venix.it


ACCESSORIES	
Removal paddle	CIAOFLA*
Panini press (optional)	CIAOPPR
Spatula for panini press (optional)	CIAOPPS
2 X Non-stick sheet 270 x 270 mm	50GPP00086*
Oven cavity protector (optional)	50GPP00093
Teflon tray 140 x 140 x 15 mm (optional)	50GPP00094
Perforated teflon tray 180 x 280 x 30 mm (optional)	50GPP00095
Teflon tray 280 x 280 x 15 mm	50GPP00096*
Detergent 750ml (optional)	DT1


*INCLUDED

VENIX SRL Via della Fornace, 49 - 31023 Castelminio di Resana (TV) - ITALY
P +39 (0) 423 420 477 / +39 (0) 423 723 608 - F +39 (0) 423 492 307
email: info@venix.it
www.venix.it

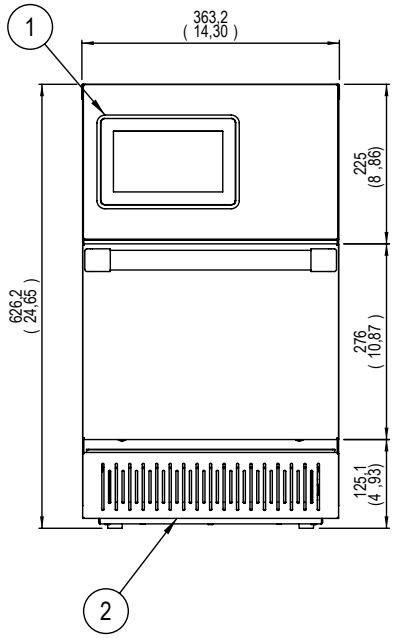

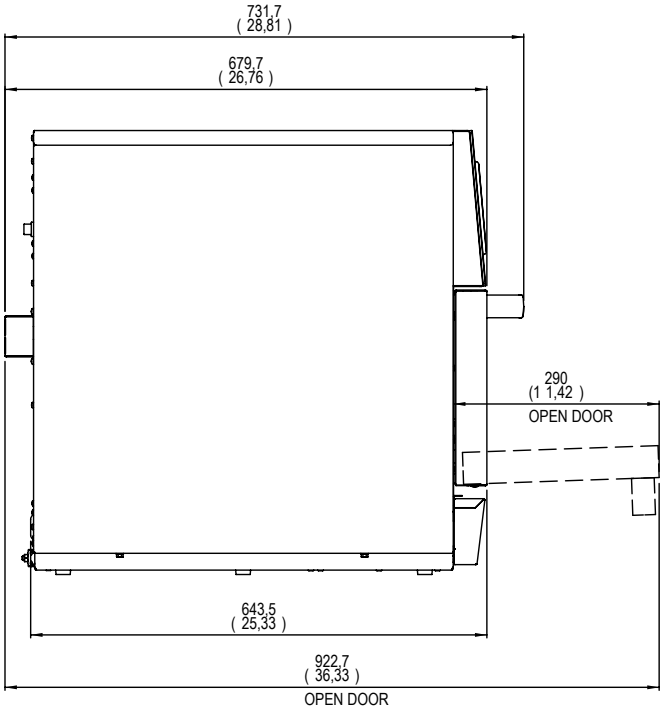

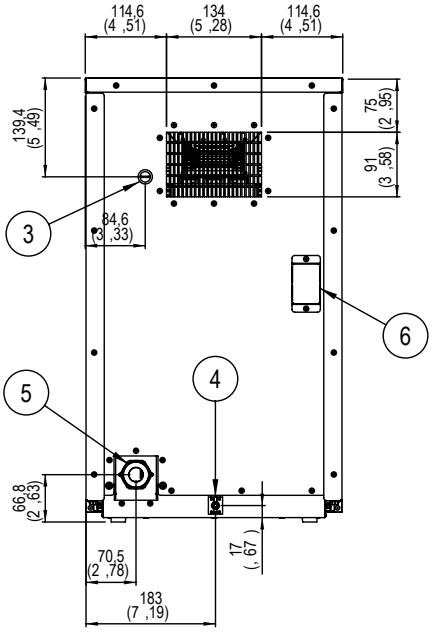

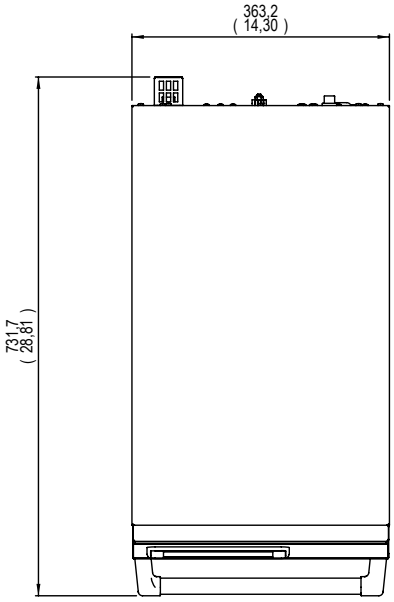

1	CAPACITIVE LCD CONTROL
2	AIR INTAKE
3	SAFETY THERMOSTAT

4	EQUIPOTENTIAL TERMINAL
5	CABLE GLAND
6	CHIMNEY OUTPUT

VENIX SRL Via della Fornace, 49 - 31023 Castelminio di Resana (TV) - ITALY
P +39 (0) 423 420 477 / +39 (0) 423 723 608 - F +39 (0) 423 492 307
email: info@venix.it
www.venix.it